

# КАТАЛОГ(ВНУТРЕННИЕ ДВЕРИ)



ПОСТАВЩИК СУДОВОГО ОБОРУДОВАНИЯ

[www.mor-sk.ru](http://www.mor-sk.ru)

тел:+7 920 030 05 75; +7 920 010 00 68

E-mail:[avponkin@yandex.ru](mailto:avponkin@yandex.ru)

E-mail:[tlk.sudokomlekt@yandex.ru](mailto:tlk.sudokomlekt@yandex.ru)




## ○ 新产品

### ▣ 一体化壁板

- 平面一体化检修门壁板




- 结构工艺（节点）：

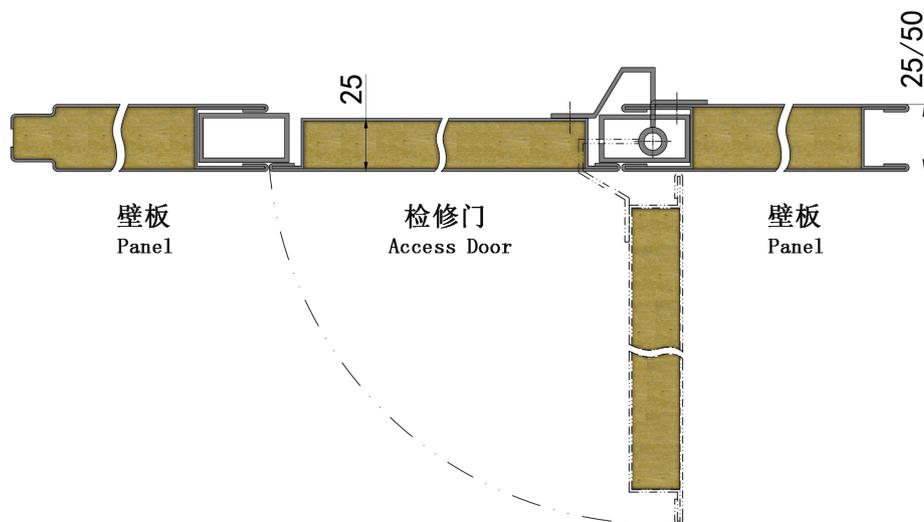





## ○ 新工艺

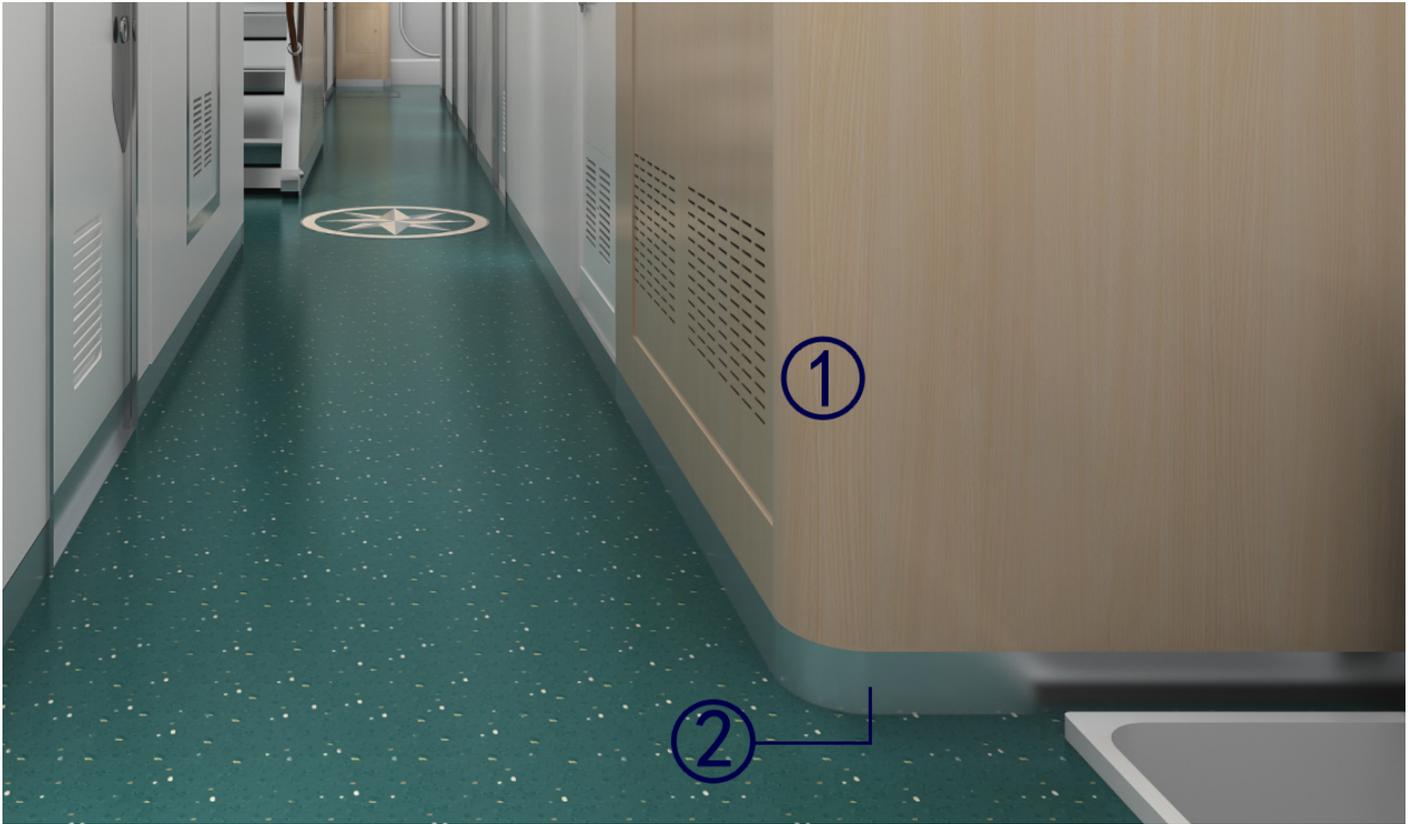

### ① 圆弧转角板(工艺)




R35 圆弧转角板 (复合岩棉壁板 A/C型)  
Arc corner panel (R100 rockwool panel)  
(Type A/C)



R100 圆弧转角板 (复合岩棉壁板 A/C型)  
Arc corner panel (R100 rockwool panel)  
(Type A/C)

### ② 不锈钢平面踢脚线 (与壁板平面一体)

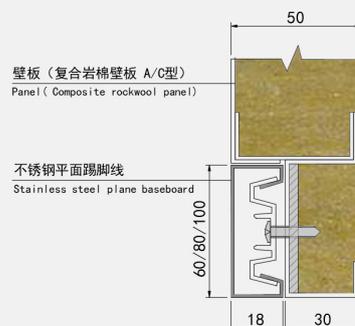



## 二、防火门


### ○ 门的开启方向定义 Definition for Opening Direction of Doors

#### - 门开启方向的定义 DEFINITION FOR DOOR OPENING DIRECTION

门的开启方向，从室外向室内看，铰链在左边的为左开门，铰链在右边的为右开门，其开启方向如下图所示，代号见下表。

LOOKING FROM OUTSIDE, THE DOOR WITH HINGE ON THE LEFT(RIGHT) SIDE IS CALLED LEFT (RIGHT) OPENING DOOR. THE OPENING DIRECTION IS INDICATED AS FIGURED. THE CODE IS INDICATED AS LISTED.

门的开启方向	OPENING DIRECTION OF DOOR	特征代号	CODE
左内开	LEFT INWARD OPENING	5.0	(LI)
左外开	LEFT OUTWARD OPENING	6.1	(LO)
右内开	RIGHT INWARD OPENING	6.0	(RI)
右外开	RIGHT OUTWARD OPENING	5.1	(RO)

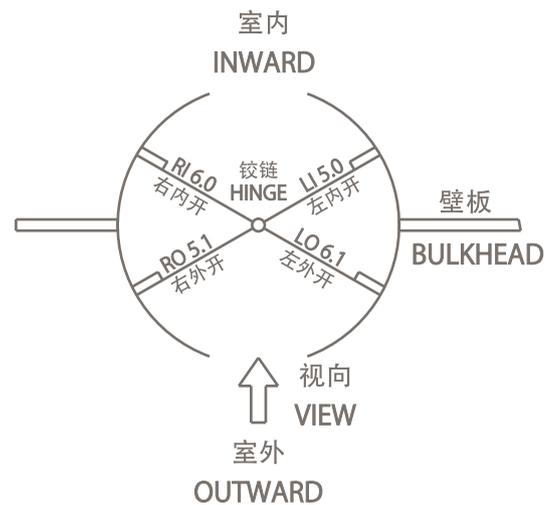



## ○ A60单开防火门

### CFM-1

门扇 Door leaf	PVC贴塑/粉末喷涂钢板 PVC laminated/powder coated steel sheet
门框 Door frame	钢板 Steel plate
	粉末喷涂 Powder coated
	不锈钢门槛盖板 Stainless steel door sill cover plate
最大通孔尺寸 Max clear open size	1200×2200
围壁开孔 Cutting size	1300×2300
外形尺寸 Size of door	1293×2293
开向 Open direction	LO/RO/LI/RI
门扇厚度 Door leaf thick	40mm
隔声值 Sound reduction value(db)	35dB
有无门槛 Sill	√
可选附件 Optional fittings	观察窗(方窗或圆窗)、逃口及消防孔 Square or round window, kick-out panel, hose port hole



## ○ A0单开防火门

### CFM-2

门扇 Door leaf	PVC贴塑/粉末喷涂钢板 PVC laminated/powder coated steel sheet
门框 Door frame	钢板 Steel plate
	粉末喷涂 Powder coated
	不锈钢门槛盖板 Stainless steel door sill cover plate
最大通孔尺寸 Max clear open size	1200×2200
围壁开孔 Cutting size	1300×2300
外形尺寸 Size of door	1293×2293
开向 Open direction	LO/RO/LI/RI
门扇厚度 Door leaf thick	40mm
隔声值 Sound reduction value(db)	35dB
有无门槛 Sill	√
可选附件 Optional fittings	/





## ○ A60双开防火门

### CFM-4

门扇 Door leaf	PVC贴塑/粉末喷涂钢板 PVC laminated/powder coated steel sheet
门框 Door frame	钢板 Steel plate
	粉末喷涂 Powder coated
	不锈钢门槛盖板 Stainless steel door sill cover plate
最大通孔尺寸 Max clear open size	1600×2200
围壁开孔 Cutting size	1700×2300
外形尺寸 Size of door	1693×2293
开向 Open direction	LO/RO/LI/RI
门扇厚度 Door leaf thick	40mm
隔声值 Sound reduction value(db)	30dB
有无门槛 Sill	√
可选附件 Optional fittings	/



## ○ A60单开防火门（无门槛）

### CFM-5

门扇 Door leaf	PVC贴塑/粉末喷涂钢板 PVC laminated/powder coated steel sheet
门框 Door frame	钢板 Steel plate
	粉末喷涂 Powder coated
	不锈钢门槛盖板 Stainless steel door sill cover plate
最大通孔尺寸 Max clear open size	1200×2200
围壁开孔 Cutting size	1300×2265
外形尺寸 Size of door	1293×2261
开向 Open direction	LO/RO/LI/RI
门扇厚度 Door leaf thick	40mm
隔声值 Sound reduction value(db)	30dB
有无门槛 Sill	/
可选附件 Optional fittings	/





## ○ A60风雨密气密防火门

### CFM-9

门扇 Door leaf	PVC贴塑/粉末喷涂不锈钢板 PVC laminated/powder coated stainless steel sheet
门框 Door frame	钢板 Steel plate
	粉末喷涂 Powder coated
	不锈钢门槛盖板 Stainless steel door sill cover plate
最大通孔尺寸 Max clear open size	1200×2750
围壁开孔 Cutting size	1300×2850
外形尺寸 Size of door	1293×2843
开向 Open direction	LO&RO
门扇厚度 Door leaf thick	40mm
隔声值 Sound reduction value(db)	/
有无门槛 Sill	√
可选附件 Optional fittings	观察窗（方窗或圆窗） Square or round window



## ○ A60风雨密气密双开防火门

### CFM-10

门扇 Door leaf	PVC贴塑/粉末喷涂不锈钢板 PVC laminated/powder coated stainless steel sheet
门框 Door frame	钢板 Steel plate
	粉末喷涂 Powder coated
	不锈钢门槛盖板 Stainless steel door sill cover plate
最大通孔尺寸 Max clear open size	2400×2750
围壁开孔 Cutting size	2500×2850
外形尺寸 Size of door	2493×2843
开向 Open direction	LO&RO
门扇厚度 Door leaf thick	40mm
隔声值 Sound reduction value(db)	/
有无门槛 Sill	√
可选附件 Optional fittings	观察窗（方窗或圆窗） Square or round window





## ○ B-15级单开防火门（无门槛）

### CFM-6

门扇 Door leaf	PVC贴塑/粉末喷涂钢板 PVC laminated/powder coated steel sheet
门框 Door frame	钢板 Steel plate
	粉末喷涂 Powder coated
	不锈钢门槛盖板 Stainless steel door sill cover plate
最大通孔尺寸 Max clear open size	1200×2200
围壁开孔 Cutting size	1300×2265
外形尺寸 Size of door	1293×2261
开向 Open direction	LO/RO/LI/RI
门扇厚度 Door leaf thick	40mm
隔声值 Sound reduction value(db)	28dB
有无门槛 Sill	/
可选附件 Optional fittings	通风栅、逃口 Ventilation louver, kick-out panel



## ○ B-15级单开防火门（上下通风）

### CFM-7A

门扇 Door leaf	PVC贴塑/粉末喷涂钢板 PVC laminated/powder coated steel sheet
门框 Door frame	钢板 Steel plate
	粉末喷涂 Powder coated
	不锈钢门槛盖板 Stainless steel door sill cover plate
最大通孔尺寸 Max clear open size	1100×2100
围壁开孔 Cutting size	1200×按实际 As required
外形尺寸 Size of door	1200×按实际 As required
开向 Open direction	LO/RO/LI/RI
门扇厚度 Door leaf thick	40mm
隔声值 Sound reduction value(db)	37dB
有无门槛 Sill	/
可选附件 Optional fittings	逃口 kick-out panel





## ○ B-15级单开防火门（独立围壁）

### CFM-3A

门扇 Door leaf	PVC贴塑/粉末喷涂钢板 PVC laminated/powder coated steel sheet
门框 Door frame	钢板 Steel plate
	粉末喷涂 Powder coated
	不锈钢门槛盖板 Stainless steel door sill cover plate
最大通孔尺寸 Max clear open size	1200×2200
围壁开孔 Cutting size	1300×按实际 As required
外形尺寸 Size of door	1300×按实际 As required
开向 Open direction	LO/RO/LI/RI
门扇厚度 Door leaf thick	40mm
隔声值 Sound reduction value(db)	30dB
有无门槛 Sill	√
可选附件 Optional fittings	通风栅、逃口、观察窗（方窗或圆窗） Ventilation louver, kick-out panel, Square or round window



## ○ B-15双开防火门

### CFM-11

门扇 Door leaf	PVC贴塑/粉末喷涂钢板 PVC laminated/powder coated steel sheet
门框 Door frame	钢板 Steel plate
	粉末喷涂 Powder coated
	不锈钢门槛盖板 Stainless steel door sill cover plate
最大通孔尺寸 Max clear open size	2000×2200
围壁开孔 Cutting size	2100×按实际 As required
外形尺寸 Size of door	2100×按实际 As required
开向 Open direction	LO/RO/LI/RI
门扇厚度 Door leaf thick	40mm
隔声值 Sound reduction value(db)	30dB
有无门槛 Sill	√
可选附件 Optional fittings	通风栅、逃口、观察窗（方窗或圆窗） Ventilation louver, kick-out panel, Square or round window





## ○ 隔音阻气防火门

### CFM-12

门扇 Door leaf	PVC贴塑/粉末喷涂钢板 PVC laminated/powder coated steel sheet
门框 Door frame	钢板 Steel plate
	粉末喷涂 Powder coated
	不锈钢门槛盖板 Stainless steel door sill cover plate
最大通孔尺寸 Max clear open size	1200×2200
围壁开孔 Cutting size	1300×2300
外形尺寸 Size of door	1293×2293
开向 Open direction	LO/RO/LI/RI
门扇厚度 Door leaf thick	40mm
隔声值 Sound reduction value(db)	40dB
有无门槛 Sill	√
可选附件 Optional fittings	/



## ○ B-15级单开隔音防火门

### CFM-3B

门扇 Door leaf	PVC贴塑/粉末喷涂钢板 PVC laminated/powder coated steel sheet
门框 Door frame	钢板 Steel plate
	粉末喷涂 Powder coated
	不锈钢门槛盖板 Stainless steel door sill cover plate
最大通孔尺寸 Max clear open size	1000×2200
围壁开孔 Cutting size	1100×按实际 As required
外形尺寸 Size of door	1100×按实际 As required
开向 Open direction	LO/RO/LI/RI
门扇厚度 Door leaf thick	40mm
隔声值 Sound reduction value(db)	45dB
有无门槛 Sill	√
可选附件 Optional fittings	逃口 Kick-out panel





## ○ 铝质隔音阻气门

CB/T 3217


适用于机舱控制室等部位

USED FOR ENGINE CONTROL ROOM AND SO ON

适应舱壁

APPLICABLE BULKHEAD

A	一道钢围壁 ONE STEEL BULKHEAD	
B	一道钢围壁 ONE STEEL BULKHEAD 一道装饰壁 ONE DECORATION BULKHEAD	
C	一道钢围壁 ONE STEEL BULKHEAD 二道装饰壁 TWO DECORATION BULKHEAD	

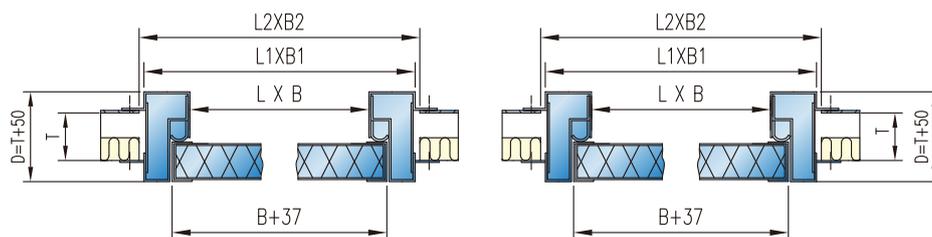

mm

类型 TYPE	通孔尺寸 CLEAR SIZE LXB	门框尺寸 SIZE OF FRAME L1XB1	围壁开孔尺寸 CUT OPENING SIZE L2XB2	D	开向 OPENING DIRECTION	选择项 OPTION
单扇 SINGLE	1600X600	1695X695	1700X700	T+50	右外 RO 左外 LO	方窗 WINDOW
	1600X800	1695X895	1700X900			闭门器 DOOR CLOSER
	1700X700	1795X795	1800X800			定门器 DOOR STOPPER
	1800X800	1895X895	1900X900			

注：通孔尺寸为 1600X600，门框深度150的钢质隔音阻气门（右外开式），参考重量为77kg。

The reference weight for 1600X600 D150-5.1 is 77 kg.



# 铝质舱室空腹门

适用于各类船舶、舰艇室，门扇表面可做喷塑处理或者贴PVC膜。

USED FOR CABIN OF VARIOUS KINDS OF SHIP AND WAR SHIPS, USED FOR CABIN OF VARIOUS KINDS OF SHIP AND WAR SHIP.

## 方角形舱室空腹门 RECTANGULAR CORNER DOOR




A	一道钢围壁 ONE STEEL BULKHEAD	
B	一道钢围壁 ONE STEEL BULKHEAD 一道装饰壁 ONE DECORATION BULKHEAD	
C	一道钢围壁 ONE STEEL BULKHEAD 二道装饰壁 TWO DECORATION BULKHEAD	

## 圆角形舱室空腹门壁 ROUND CORNER DOOR

A	一道钢围壁 ONE STEEL BULKHEAD	
B	一道钢围壁 ONE STEEL BULKHEAD 一道装饰壁 ONE DECORATION BULKHEAD	
C	一道钢围壁 ONE STEEL BULKHEAD 二道装饰壁 TWO DECORATION BULKHEAD	

262WHL010A-00

262WHL010Y-00

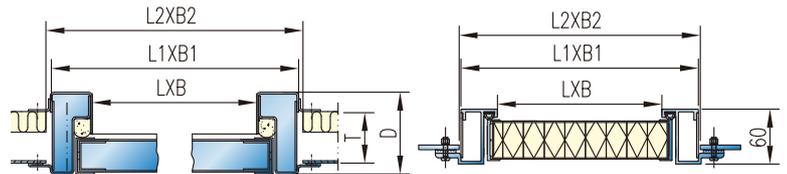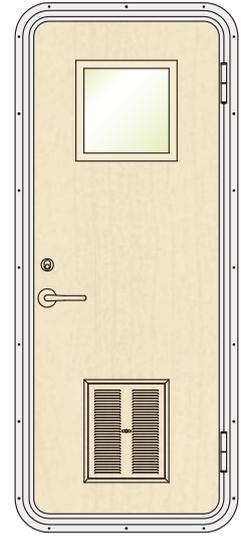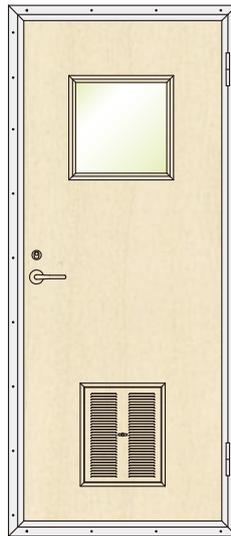

mm

类型 TYPE	通孔尺寸 CLEAR SIZE LXB	门框尺寸 SIZE OF FRAME L1XB1	围壁开孔尺寸 CUT OPENING SIZE L2XB2	D	开向 OPENING DIRECTION	选择项 OPTION
单扇 SINGLE	1600X600	1680X680	1680X680	60 T+50	右外 RO 左外 LO	方窗 WINDOW
	1600X800	1680X880	1680X880			应急逃口 ESCAPE
	1700X700	1780X780	1780X780			通风栅 VENT LOUVER
	1700X800	1780X880	1780X880			闭门器 DOOR CLOSER
	1800X800	1880X880	1880X880			定门器 DOOR STOPPER

注：通孔尺寸为 1600X600，门框深度150的铝质舱室空腹门（右外开式），参考重量为38kg。


The reference weight for A1600X600 D150-5.1 262WHL010A-00 is 38kg.



## ○ 铝制隔声门


262WHL009A-00

隔声值37dB  
SOUND PROOF VALUE 37 dB

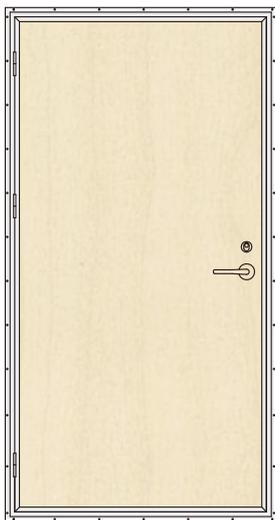





262WHL009T-00

隔声值35dB  
SOUND PROOF VALUE 35 dB

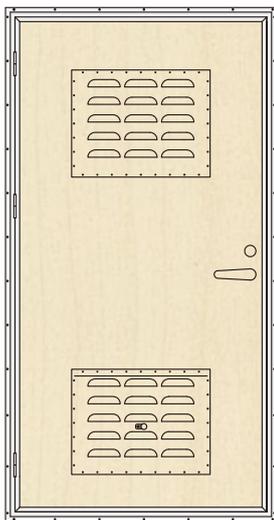

262WHL009V-00

隔声值25dB  
SOUND PROOF VALUE 25 dB

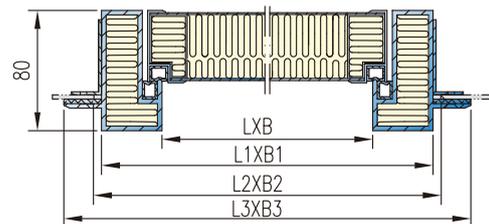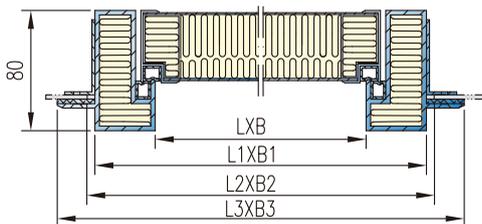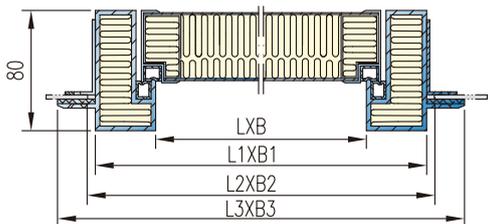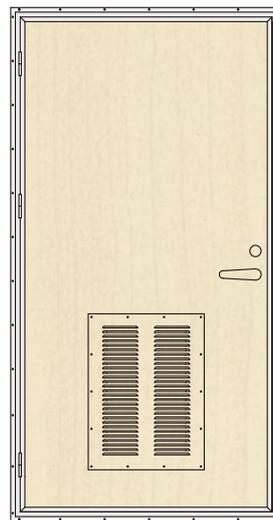

mm

类型 TYPE	通孔尺寸 CLEAR SIZE LXB	门框尺寸 SIZE OF FRAME L1XB1	围壁开孔尺寸 CUT OPENING SIZE L2XB2	D	开向 OPENING DIRECTION	选择项 OPTION
单扇 SINGLE	1600X600	1680X680	1680X680	80	右外 RO 左外 LO	闭门器 DOOR CLOSER 定门器 DOOR STOPPER
	1600X800	1680X880	1680X880			
	1700X700	1880X780	1780X780			
	1750X700	1830X780	1830X780			

注：通孔尺寸为 1650X650 的铝质隔声门（右外开式），参考重量为44kg。

The reference weight for 1650X650-5.1 262WHL009A-00 is 44kg.




# A0隔声防火门


262WHL016X-00

隔声值38dB  
SOUND PROOF VALUE 38 dB

适应舱壁  
APPLICABLE BULKHEAD

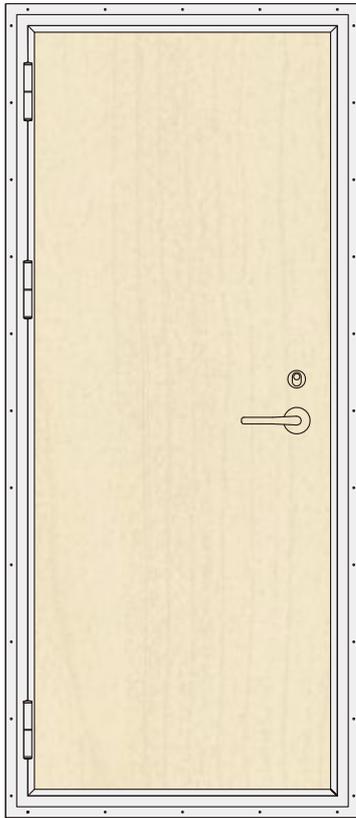

A	一道钢围壁 ONE STEEL BULKHEAD	
B	一道钢围壁 ONE STEEL BULKHEAD 一道装饰壁 ONE DECORATION BULKHEAD	
C	一道钢围壁 ONE STEEL BULKHEAD 二道装饰壁 TWO DECORATION BULKHEAD	

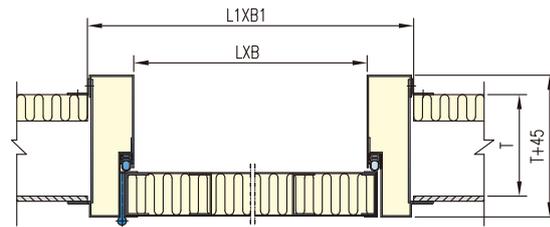

类型 TYPE	通孔尺寸 CLEAR SIZE LXB	门框尺寸 SIZE OF FRAME L1XB1	围壁开孔尺寸 CUT OPENING SIZE L2XB2	D	开向 OPENING DIRECTION	选择项 OPTION
单扇 SINGLE	1600X600	1695X695	1700X700	T+45	右外 RO 左外 LO	闭门器 DOOR CLOSER 定门器 DOOR STOPPER
	1700X700	1795X795	1800X800			
	1800X800	1995X995	1900X900			
	2000X1000	2095X1095	2100X1100			


注：通孔尺寸为 1600X600.门框深度150的A0隔声防火门（右外开式），参考重量为70g。

The reference weight for 1600X600 D150-5.1 262WHL016X-00 is 70kg.



○ 单扇防火门

CB/T 3234

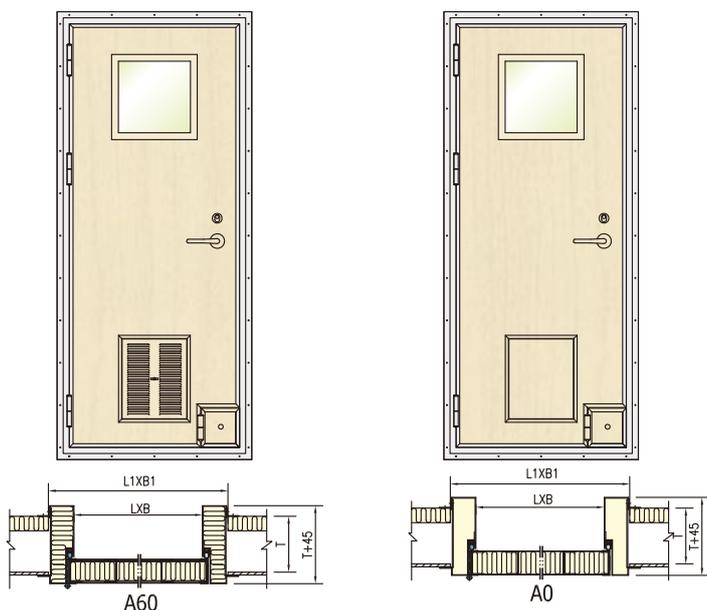

等级 CLASS	分类 TYPE	开向 OPENING DIR.
A级 CLASS A	A60	左内 LI (ZN) 左外 LO (ZW)
	A0	
B级 CLASS B	B15	右内 RI (YN) 右外 RO (YW)

适应舱壁

APPLICABLE BULKHEAD

A	一道钢围壁 ONE STEEL BULKHEAD	
B	一道钢围壁 ONE STEEL BULKHEAD 一道装饰壁 ONE DECORATION BULKHEAD	
C	一道钢围壁 ONE STEEL BULKHEAD 二道装饰壁 TWO DECORATION BULKHEAD	









## ○ A级防火门

A60 级防火门 262WHL005X-00  
A60 CLASS FIRE-PROOF DOOR

A0 级防火门 262WHL016X-00  
A0 CLASS FIRE-PROOF DOOR

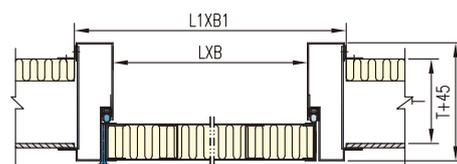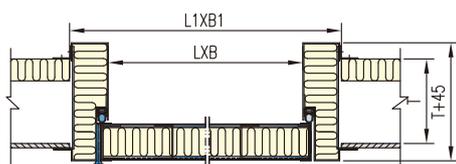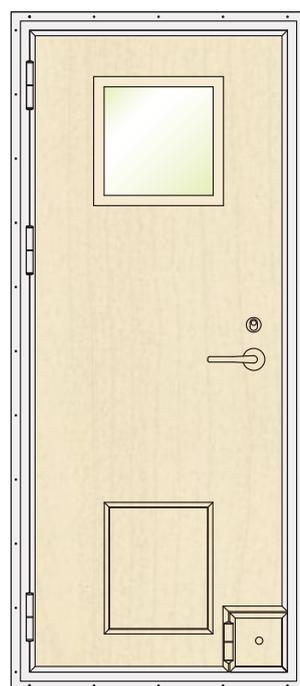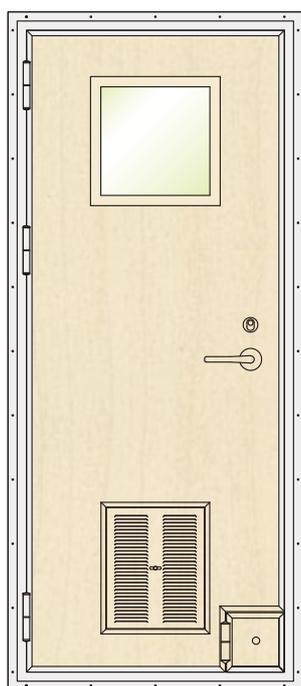

mm

类型 TYPE	通孔尺寸 CLEAR SIZE LXB	门框尺寸 SIZE OF FRAME L1XB1	围壁开孔尺寸 CUT OPENING SIZE L2XB2	D	开向 OPENING DIRECTION	选择项 OPTION
A60防火门 A60 FIRE-PROOF DOOR	1600X600	1695X695	1700X700	T+45	右外 RO	方窗 WINDOW
	1700X700	1795X795	1800X800			应急逃口 ESCAPE
	1800X800	1895X895	1900X900			通风栅 VENT LOUVER
	2300X1300	2395X1395	2400X1400			消防小门 HOSE PORT 闭门器 DOOR CLOSER
A0防火门 A0 FIRE-PROOF DOOR	1600X600	1695X695	1700X700		左外 LO	方窗 WINDOW
	1700X700	1795X795	1800X800			应急逃口 ESCAPE
	1800X800	1895X895	1900X900			消防小门 HOSE PORT
	2300X1300	2395X1395	2400X1400			闭门器 DOOR CLOSER

注：通孔尺寸为 1600X600，门框深度150的A60防火门（右外开式），参考重量为93kg。

The reference weight for 1600X600 D150-5.1 262WHL005X-00 is 93kg.


通孔尺寸为 1600X600，门框深度150的A0防火门（右外开式），参考重量为68kg。

The reference weight for 1600X600 D150-5.1 262WHL016X-00 is 68kg.


## ○ B15级防火门

262WHL006X-00

B15 级防火门 262WHL006X-00  
B15 CLASS FIRE-PROOF DOOR

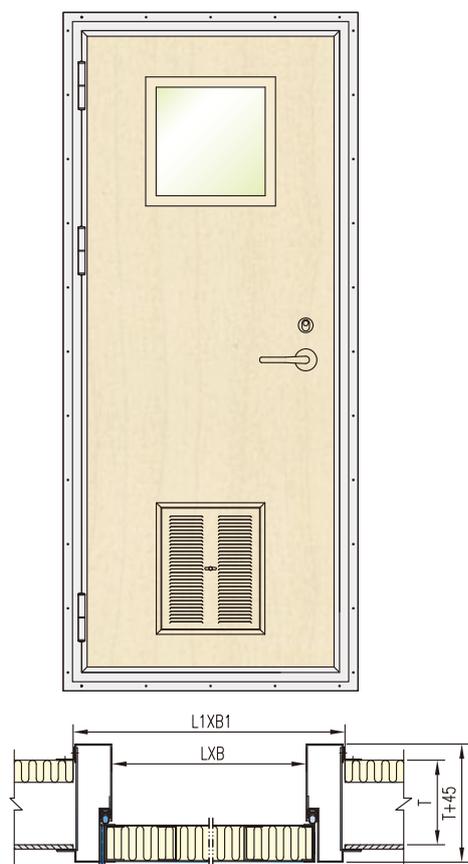

B15 级独立壁防火门 262WHL006S-00  
B15 CLASS PANEL INSTALLED DOOR

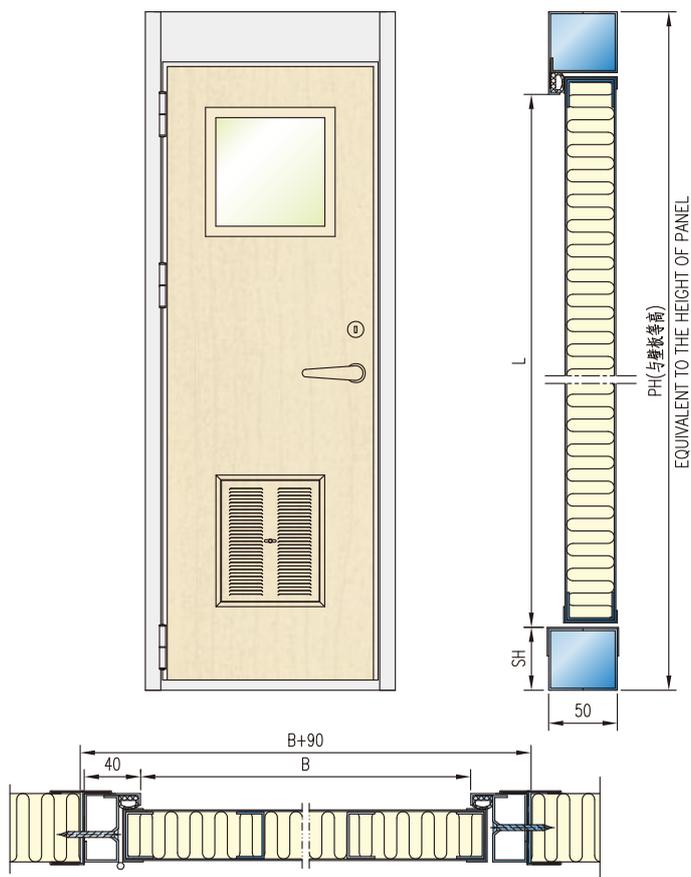

mm

类型 TYPE	通孔尺寸 CLEAR SIZE LXB	门框尺寸 SIZE OF FRAME L1XB1	围壁开孔尺寸 CUT OPENING SIZE L2XB2	D	开向 OPENING DIRECTION	选择项 OPTION
B15防火门 B15 CLASS FIRE-PROOF DOOR	1600X600	1695X695	1700X700	T+45	右外 RO 左外 LO	方窗 WINDOW 应急逃口 ESCAPE 通风栅 VENT LOUVER 闭门器 DOOR CLOSER 定门器 DOOR STOPPER
	1700X700	1795X795	1800X800			
	1800X800	1895X895	1900X900			
	2300X1300	2395X1395	2400X1400			
B15 级独立 壁防火门 B15 CLASS PANEL INSTALLED DOOR	1600X600	—	—	50	右外 RO 左外 LO	方窗 WINDOW 应急逃口 ESCAPE 通风栅 VENT LOUVER 闭门器 DOOR CLOSER 定门器 DOOR STOPPER
	1700X700					
	1800X800					
	2300X1200					

注：通孔尺寸为 1600X600，门框深度150的B15防火门（右外开式），参考重量为68kg。

The reference weight for 1600X600 D150-5.1 262WHL006X-00 is 68kg.


通孔尺寸为 1600X600，门框总高2400,门槛高度50的B15独立壁防火门（右外开式），参考重量为69.8kg。

The reference weight for 1600X600 D150-5.1 262WHL006S-00 is 69.8kg.



## ○ A60级双扇防火门(带窗、消防孔)

262WHH005S-00

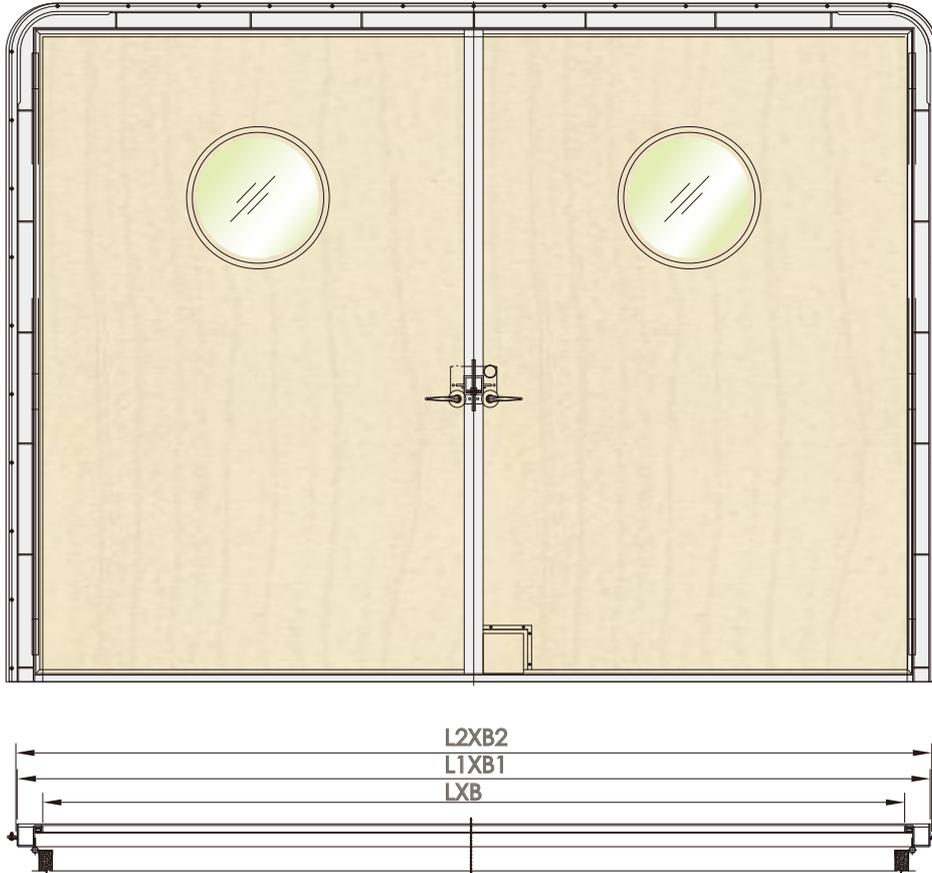

mm

	通孔尺寸 CLEAR SIZE LXB	门框尺寸 DOOR FRAME SIZE L1XB1	围壁开孔尺寸 CUT OPENING SIZE L2XB2	选择项 OPTION
双扇 DOUBLEAF 262WHH005S-00	1600X1500	1790X1690	1800X1700	窗 闭门器 定门器 WINDOW DOOR CLOSER DOOR STOPER
	1600X1600	1790X1790	1800X1800	
	1700X1700	1890X1890	1900X1900	
	1800X1800	1990X1990	2000X2000	
	1900X2000	2090X2190	2100X2200	
	2000X2400	2190X2590	2200X2600	
	2100X2600	2290X2790	2300X2800	
	2200X2800	2390X2990	2400X3000	
	2300X3000	2490X3190	2500X3200	
	2380X3200	2570X3390	2580X3400	


注：通孔尺寸为1600X1500 A60级双扇防火门(带窗、消防孔)(双外式)，参考重量为170kg。

The reference weight for A60 1600X1500-6.1&5.1 262WHH005S-00 is 170kg



# 阻火分隔30级铝质隔音防火门

262WHL004-00

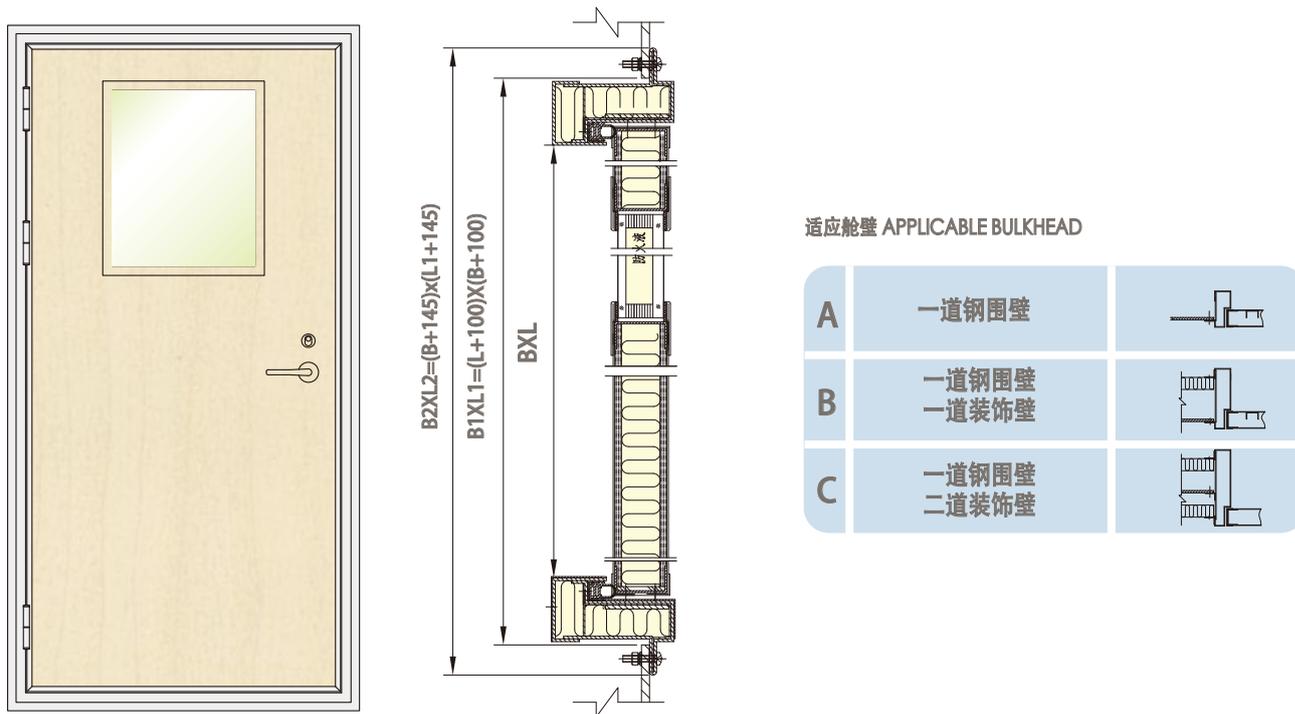

mm				
通孔尺寸 CLEAR SIZE LXB	围壁开孔尺寸 CUT OPENING SIZE L1XB1	外形尺寸 OVERALL DIMENSIONS L2XB2	D	开向 OPENING DIRECTION
1600X600	1700X700	1700X700X150	T+45	右外 RO 左外 LO
1700X700	1800X800	1800X800X150		
1800X800	1900X900	1900X900X150		
1900X900	2000X1000	2000X1000X150		

注:




通孔尺寸为 1900X900,门框深度90的阻火分隔30级铝质隔音防火门。(左外开式), 参考重量为90kg

The reference weight for 1900X900 D90-6.1 262WHL004-00 is 90kg



# ○ B15级防火移门

262WDL021-00

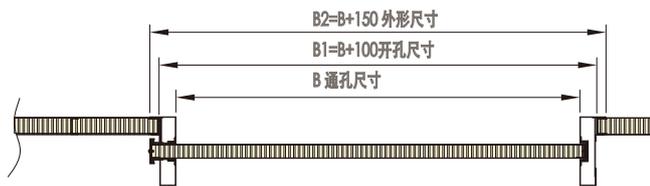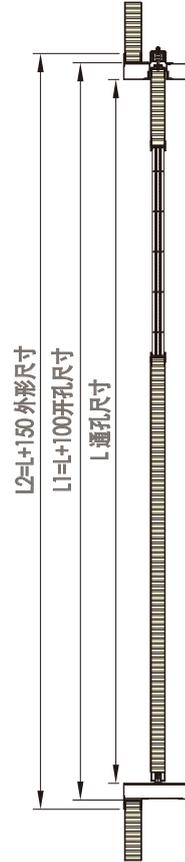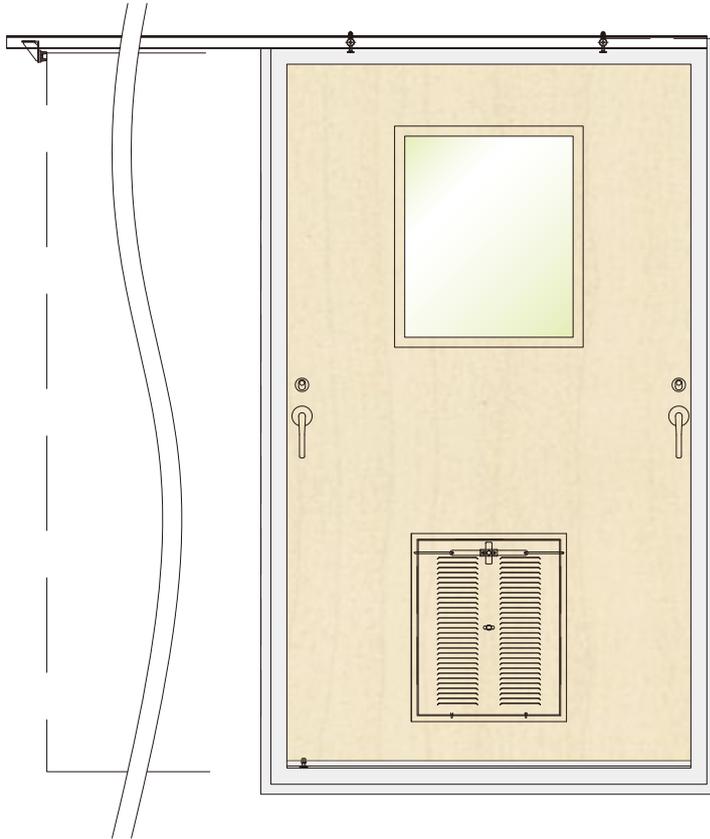

通孔尺寸 CLEAR SIZE LXB	围壁开孔尺寸 WALL CUT OPENING L1XB1	门框外形尺寸 DOOR FRAME SIZE L2XB2	移向 SLIDING
1700X800	1800X900	1850X950	左移 L
1800X900	1900X1000	1950X1050	
1900X1000	2000X1100	2050X1150	右移 R
2000X1100	2100X1200	2150X1250	
2100X1200	2200X1300	2250X1350	

注:


通孔尺寸为1700X800D为205的左移式B15级防火移门参考重量为79kg。

The reference weight for 1700X800N D205-L262WDL021-00 is 79kg.



### ○ A0级防火旁开双折层门


262WHH071-00

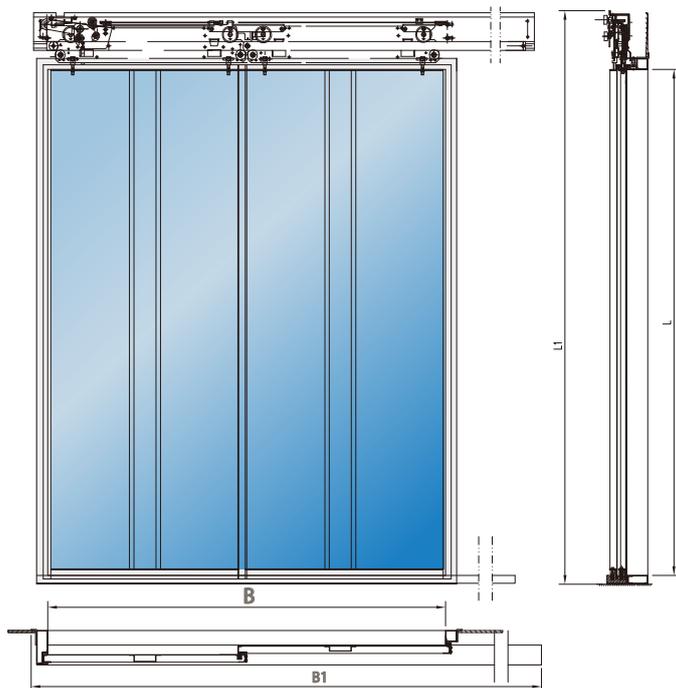

通孔尺寸 CLEAR SIZE LXB	外形尺寸 OVERALL DIMENSION L1XB1
1900X1600	2270X2507
2000X1700	2370X2670
2200X1700	2570X2670
2300X1800	2607X2770

### ○ A0级防火中分层门

262WHH072-00

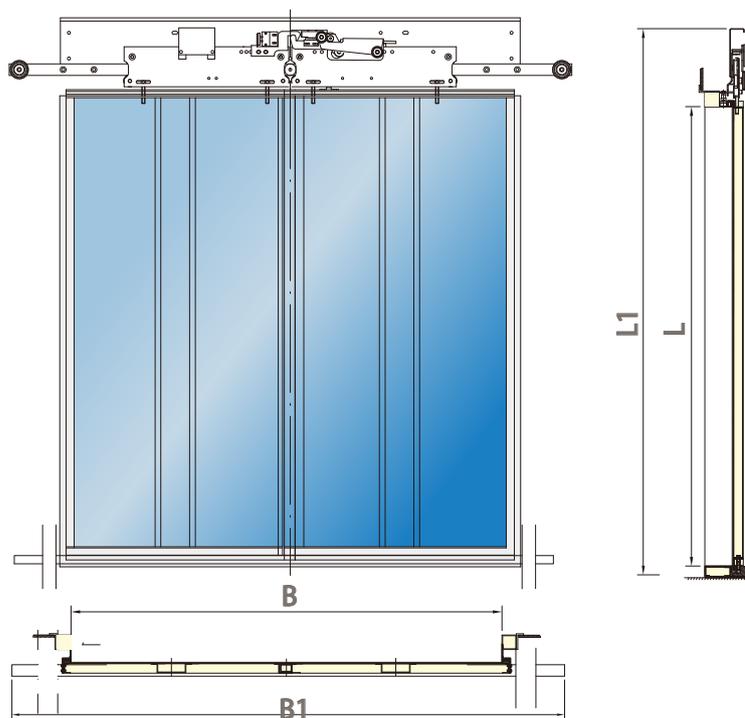


A0级防火中分层门  
AO LANDING DOOR FOR ELEVATOR(TWO PANELS SIDE)

通孔尺寸 CLEAR SIZE LXB	外形尺寸 OVERALL DIMENSION L1XB1
2000X800	2314X2300
2000X1200	2314X2700
2200X1400	2514X2900
2300X1500	2514X3000



## ○ A0级防火中分双折层门

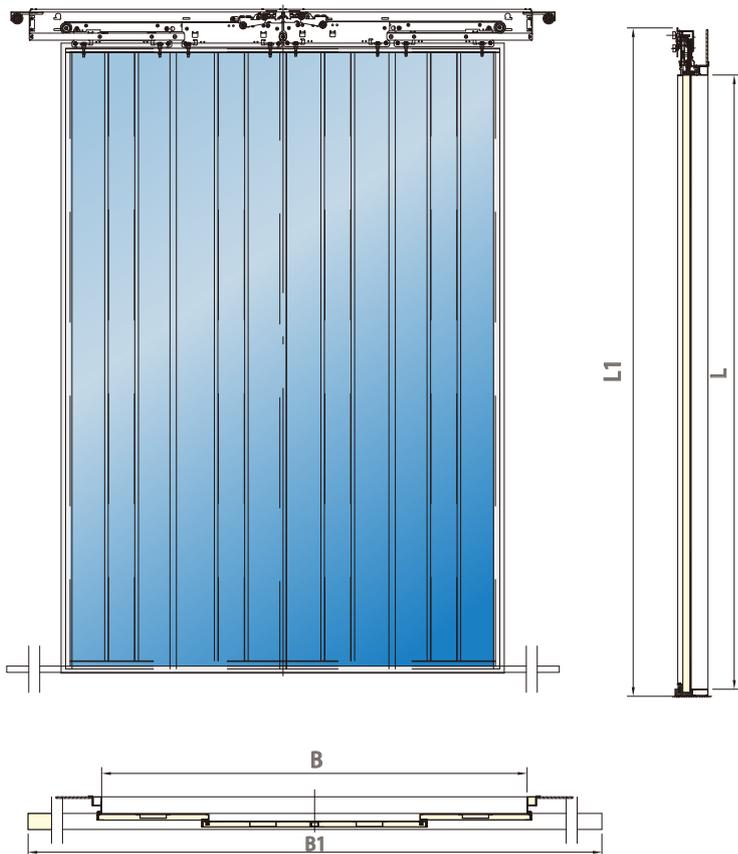

通孔尺寸 CLEAR SIZE LXB	外形尺寸 OVERALL DIMENSION L1XB1
1800X800	2107X2000
1900X900	2207X2100
2000X1000	2307X2200
2000X1400	2307X2600
2000X1800	2307X3000
2200X2000	2507X3200
2400X2400	2707X3600



## ○ B15 壁板检修门

### CFM-AD1

门扇 Door leaf	PVC贴塑/粉末喷涂钢板 PVC laminated/powder coated steel sheet
门框 Door frame	PVC贴塑钢板 PVC laminated galvanized steel sheet with protective foil
通孔尺寸 Clear open size	600×1800
围壁开孔 Cutting size	640×1840
外形尺寸 Size of door	634×1836
开向 Open direction	LO/RO
门扇厚度 Door leaf thick	30mm



## ○ 天花板检修口

### CFM-AD3


门扇 Door leaf	PVC贴塑/粉末喷涂钢板 PVC laminated/powder coated steel sheet
门框 Door frame	PVC贴塑钢板 PVC laminated galvanized steel sheet with protective foil
通孔尺寸 Clear open size	450×600
围壁开孔 Cutting size	490×640
外形尺寸 Size of door	484×636
开向 Open direction	LO/RO
门扇厚度 Door leaf thick	30mm






### S - TYPE DOOR FRAME

C型单元式


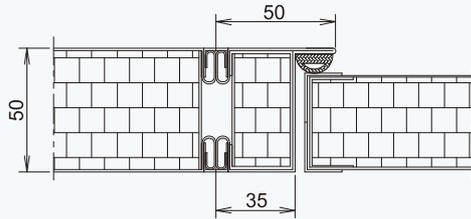


边框单元式


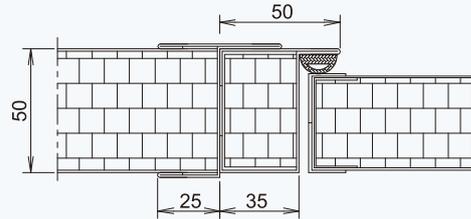


### A - TYPE DOOR FRAME


TYPE A1

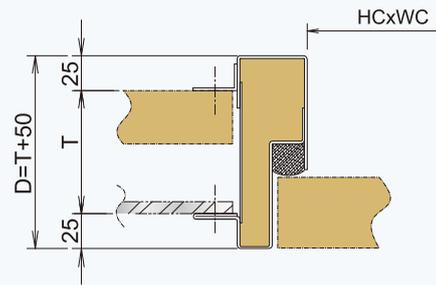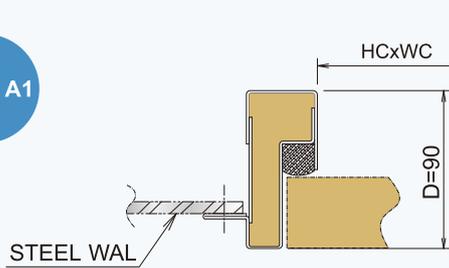

TYPE A2

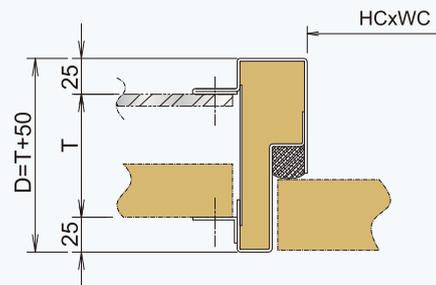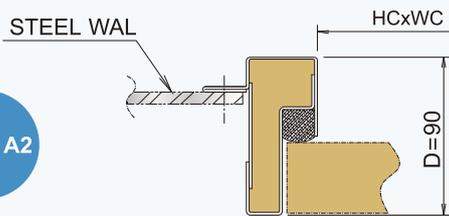


TYPE A3  
D≤200

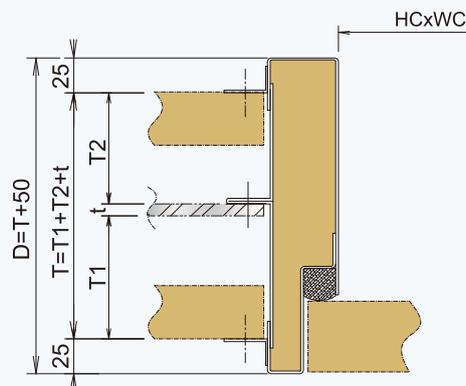




## B - TYPE DOOR FRAME

TYPE B1

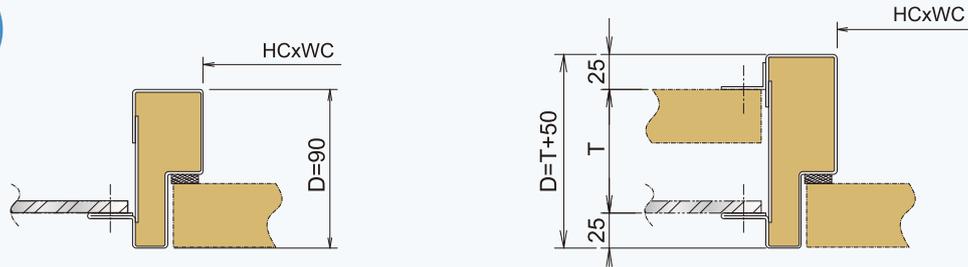


## DOUBLE WALL

TYPE B2

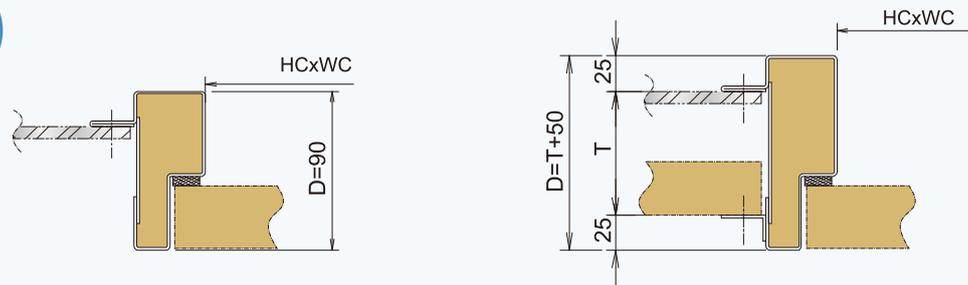

## TRIPLE WALL

TYPE B3  
 $D \leq 200$

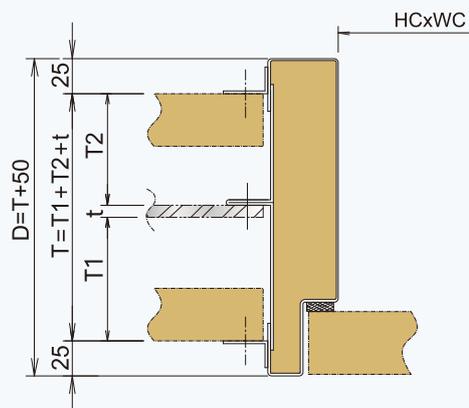



## 防火门型式认可证书一览表 FIREPROOF DOOR TYPE APPROVAL CERTIFICATE LIST

型号 Type	名称 Product Name	防火等级 Fire class	厚度 Thickness	船级社 Classification Society						
				CCS	DNV.GL	ABS	LR	RS	NK	KR
CFM-1	A-60级单开防火门 (带方窗、逃口、消防孔) A-60 Class Single Leaf Fireproof Door	A-60	40	√	√	√	√	√	√	○
CFM-2	A-0级单开防火门 A-0 Class Single Leaf Fireproof Door	A-0	40	√	√	√	√	√	√	○
CFM-3	B-15级单开防火门 (带逃口、风栅) B-15 Class Single leaf Fireproof Door (with kick-out panel, ventilation)	B-15	40	√	√	√	√	√	√	○
CFM-3A	B-15级单开防火门 (带逃口、风栅、窗) B-15 Class Single leaf Fireproof Door (with kick-out panel, ventilation, window)	B-15	40	√	√				√	
CFM-4	A-60级双开防火门 A-60 Class Double Leaf Fireproof Door	A-60	40	√	√	√	√	√	√	○
CFM-5	A-60级单开防火门 (无门槛) A-60 Class Single leaf Fireproof Door (without Sill)	A-60	40	√	√					
CFM-6	B-15级单开防火门 (无门槛, 带逃口、风栅开启) B-15 Class Single leaf Fireproof Door (without Sill)	B-15	40	√	√					
CFM-7A	B-15级单开防火门 (无门槛, 上下通风) B-15 Class Single leaf Fireproof Door (Upper and Lower vent)	B-15	40	√	√					
CFM-9	A-60级风雨密气密单开防火门 A-60 Class Weathertight Gastight Single Leaf Fireproof door	A-60	40	√		√				
CFM-10	A-60级风雨密气密双开防火门 A-60 Class Weathertight Gastight Double Leaf Fireproof door	A-60	40	√		√				
CFM-11	B-15级双开防火门 (带逃口、风栅、窗) B-15 Class Double leaf Fireproof Door (with kick-out panel, ventilation, window)	B-15	40	√	√				√	
CFM-12	A-60级隔音阻气单开防火门 A-60 Class Sound Reduction Single Leaf Fireproof Door	A-60	40	√	√					
CFM-3B	B-15级单开隔音防火门 B-15 Class Sound Reduction Single Leaf Fireproof Door	B-15	40	√	√					
CFM-AD1	B-15级检修门 B-15 class Inspection Hatch	B-15	30	√	√		√		√	
CFM-AD3	天花板检修口 Access Panel For Ceiling		30	○	○					

√ 表示已申请证书    √ means already got the certificate    ○ 表示正在申请或正在发证阶段    ○ means in the process of applying and granting certificate